


Number Designation Test Cable Assemblies

Nummernschlüssel Testkabel-Assemblies

L-	U7-	031-	600
			Length cm
		Successive Number	
		(precise connectors and armouring, please see data sheet)	
	Cable group		
Leitung (Test Cable Assembly)			

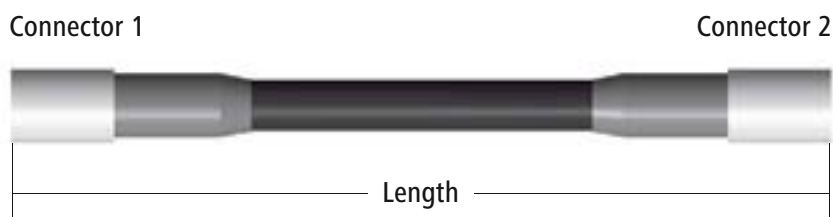

Test Cable Assemblies

Ordering Number	Return Loss	Frequency	Length	Cable	Connector 1	Connector 2	Armouring
L20-001-600	≥ 28 dB @ DC to 3 GHz ≥ 23 dB @ 3 GHz to 4 GHz	DC to 4 GHz	600 mm	RG 216/U	RPC-N 75 Ω male, P5 S 123-320CS	RPC-N 75 Ω male, P5 S 123-320CS	Protection braid
LU1-003-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.40 female ruggedized, 09 KR 123-2U1S3	RPC-2.40 male, 09 S 123-2U1S3	ETFE Tubing with protection braid
LU1-004-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.40 female ruggedized, 09 KR 123-2U1S3	RPC-SL 40 GHz female, P4 K 123-2U1S3	ETFE Tubing with protection braid
LU1-005-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.92 female ruggedized, 02 KR 123-2U1S3	RPC-2.92 male, 02 S 123-2U1S3	ETFE Tubing with protection braid
LU1-006-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.92 female ruggedized, 02 KR 123-2U1S3	RPC-2.92 female, 02 K 123-2U1S3	ETFE Tubing with protection braid
LU1-022-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.92 female ruggedized, 02 KR 123-2U1S3	RPC-SL 40 GHz female, P4 K 123-2U1S3	ETFE Tubing with protection braid
LU1-025-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.40 female ruggedized, 09 KR 123-2U1S3	RPC-2.40 female, 09 K 123-2U1S3	ETFE Tubing with protection braid
LU1-034-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.40 female ruggedized, 09 KR 123-2U1S3	RPC-2.92 male, 02 S 123-2U1S3	ETFE Tubing with protection braid
LU1-045-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 40 GHz	DC to 40 GHz	600 mm	RTK 106	RPC-2.40 female ruggedized, 09 KR 123-2U1S3	RPC-2.92 female, 02 K 123-2U1S3	ETFE Tubing with protection braid
LU7-031-600	≥ 28 dB @ DC to 4 GHz ≥ 20 dB @ 4 to 18 GHz	DC to 18 GHz	600 mm	RTK 162	RPC-3.50 female ruggedized, 03 KR 123-2U7S3	RPC-7, 07 P 123-2U7S3	ETFE Tubing with protection braid
LU7-035-600	≥ 26 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 26.5 GHz	DC to 26.5 GHz	600 mm	RTK 162	RPC-3.50 female ruggedized, 03 KR 123-2U7S3	RPC-SL 26.5 GHz female, 04 K 123-2U7S3	ETFE Tubing with protection braid
LU7-039-600	≥ 26 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 26.5 GHz	DC to 26.5 GHz	600 mm	RTK 162	RPC-3.50 male, 03 S 123-2U7S3	RPC-3.50 female ruggedized, 03 KR 123-2U7S3	ETFE Tubing with protection braid
LU7-042-600	≥ 28 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 18 GHz	DC to 18 GHz	600 mm	RTK 162	RPC-N 50 Ω male, 05 S 123-2U7S3	RPC-N 50 Ω male, 05 S 123-2U7S3	ETFE Tubing with protection braid
LU7-043-600	≥ 26 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 26.5 GHz	DC to 26.5 GHz	600 mm	RTK 162	RPC-3.50 female, 03 K 123-2U7S3	RPC-3.50 female ruggedized, 03 KR 123-2U7S3	ETFE Tubing with protection braid
LU7-055-600	≥ 26 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 26.5 GHz	DC to 26.5 GHz	600 mm	RTK 162	RPC-3.50 male, 03 S 123-2U7S3	RPC-3.50 female, 03 K 123-2U7S3	ETFE Tubing with protection braid
LU7-056-600	≥ 28 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 18 GHz	DC to 18 GHz	600 mm	RTK 162	RPC-3.50 female ruggedized, 03 KR 123-2U7S3	RPC-N 50 Ω female, 05 K 123-2U7S3	ETFE Tubing with protection braid
LU7-069-600	≥ 28 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 18 GHz	DC to 18 GHz	600 mm	RTK 162	RPC-3.50 female ruggedized, 03 KR 123-2U7S3	RPC-N 50 Ω male, 05 S 123-2U7S3	ETFE Tubing with protection braid
LU7-070-600	≥ 28 dB @ DC to 4 GHz ≥ 20 dB @ 4 GHz to 18 GHz	DC to 18 GHz	600 mm	RTK 162	RPC-7, 07 P 123-2U7S3	RPC-7, 07 P 123-2U7S3	ETFE Tubing with protection braid
LU8-005-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 50 GHz	DC to 50 GHz	600 mm	RTK 125	RPC-2.40 male, 09 S 123-2U8S3	RPC-2.40 female ruggedized, 09 KR 123-2U8S3	ETFE Tubing with protection braid
LU8-006-600	≥ 26 dB @ DC to 4 GHz ≥ 17 dB @ 4 GHz to 50 GHz	DC to 50 GHz	600 mm	RTK 125	RPC-2.40 female, 09 K 123-2U8S3	RPC-2.40 female ruggedized, 09 KR 123-2U8S3	ETFE Tubing with protection braid